




*PIMA-Betonmuffenrohre mit integrierter Dichtung,
stahlfaserbewehrt AS2 - gemäß ÖNORM B5074*

Stand 02.2025

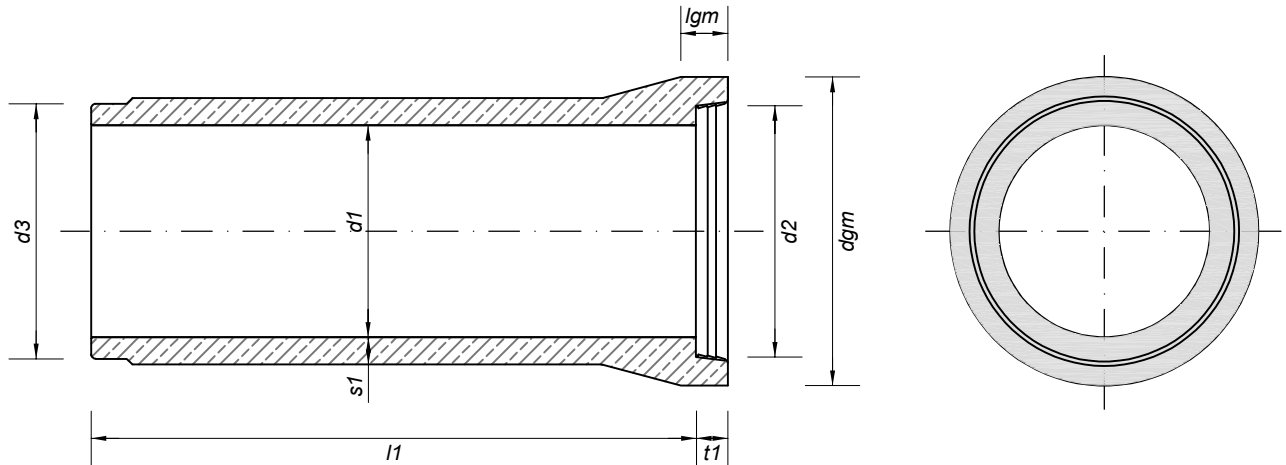

Nennweite d1	Wandstärke in mm s1	Baulänge in mm l1	Gewicht kg/lm	In mm d2	In mm d3	In mm t1	In mm lgm	In mm dgm
250 K int	65	2000	163	315	322	80	120	450
500 K int	85	2000	413	600	610	90	170	750
600 K int	80	2000	465	716	726	90	150	880
700 K int	90	2000	613	830	842	100	170	1040
800 K int	105	2000	803	948	960	100	145	1160
1000 K int	120	2000	1143	1185	1193	100	140	1435
300 KW int	70	2000	215	394	400	80	120	550
400 KW int	75	2000	305	495	506	90	135	655
900 KW int	150	2000	1218	1068	1078	100	140	1300